

VLA107-644/-655/-666/-677R

4 OUTPUTS ISOLATED DC-DC CONVERTER

DESCRIPTION


The VLA107 is an isolated DC-DC converter module which has 4 outputs designed to inverter control. Isolation strength is 2500Vrms between the input and outputs, also each outputs.

FEATURES


- Input voltage 12 ~ 24V
- Output 12 ~ 24V / 120mA x4
- Isolation voltage strength
 - 2500Vrms, 1 minute (Input to output)
 - 2500Vrms, 1minute (Each outputs)
- Low noise
- No optical coupler
- ROHS compliance

APPLICATIONS

- 3 phase inverter control

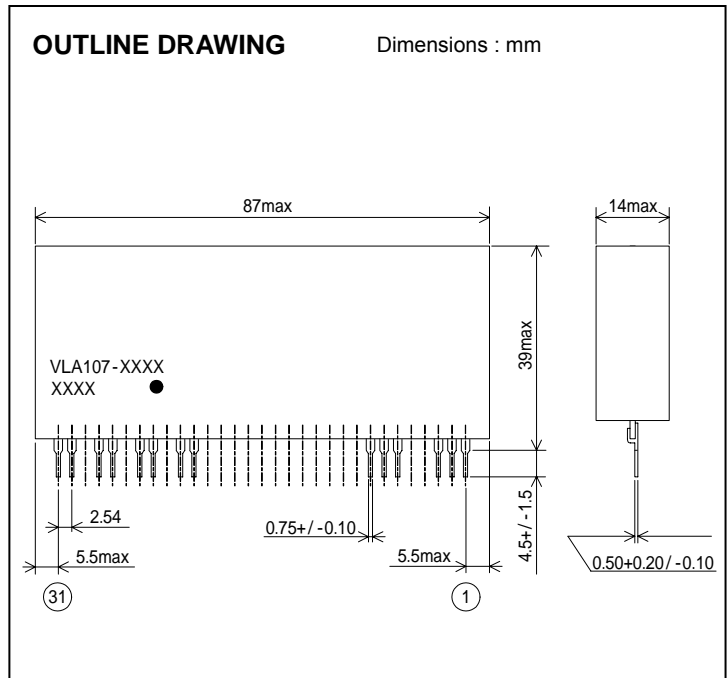

BLOCK DIAGRAM

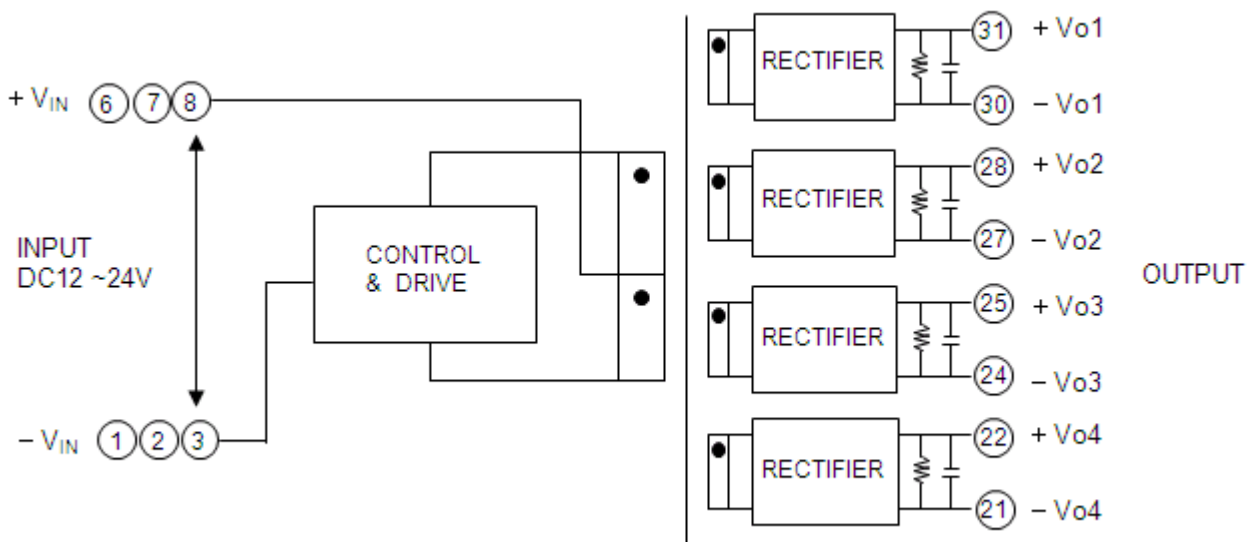


<<VLA107-644R>>

MAXIMUM RATINGS (unless otherwise noted, $V_{IN}=24V, T_a=25^{\circ}C$)

Symbol	Parameter	Conditions	Ratings	Unit
V_{IN}	Input voltage	Between pins 1,2,3 and 6,7,8	25	V
I_o	Output current	Between pins 21-22,24-25,27-28,30-31	120	mA
T_{opr}	Operating temperature	No condensation	-30 ~ +75(*1)	$^{\circ}C$
T_{stg}	Storage temperature	No condensation	-40 ~ +85	$^{\circ}C$
V_{iso1}	Isolation voltage between input and output	Sine wave voltage, 60Hz, 1min	2500	Vrms
V_{iso2}	Isolation voltage between each output	Sine wave voltage, 60Hz, 1min	2500	Vrms


(*1) Please refer to de-rating characteristics.

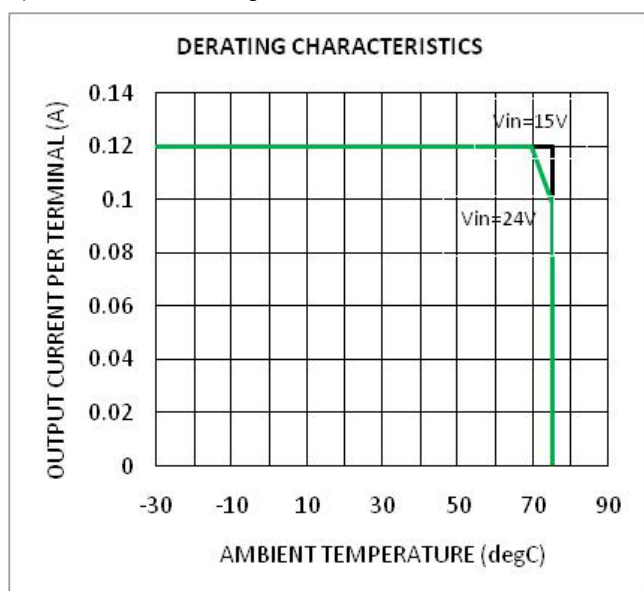**ELECTRICAL CHARACTERISTICS** (unless otherwise noted, $T_a=25^{\circ}C$)


Symbol	Parameter	Test conditions	Limits			Unit
			MIN.	TYP.	MAX.	
V_{IN}	Input voltage	Recommended range	12	-	24	V
V_{ox}	Output voltage	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0mA$	15.5	16.5	17.5	V
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	13	14	15	
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=10mA, I_{o4}=30mA$	14.5	15.5	16.5	
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=30mA, I_{o4}=90mA$	14	15	16	
Reg_L	Load regulation	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0 \sim 120mA$	-	13	-	%
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=0mA, I_{o4}=0 \sim 120mA$	-	6	-	
V_{p-p}	Output ripple	$V_{IN}=24V, I_{ox}=120mA$	-	40	-	mVp-p
η	Efficiency	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	-	75	-	%

<<VLA107-644R>> TYPICAL CHARACTERISTIC CURVES


EFFICIENCY - OUTPUT POWER

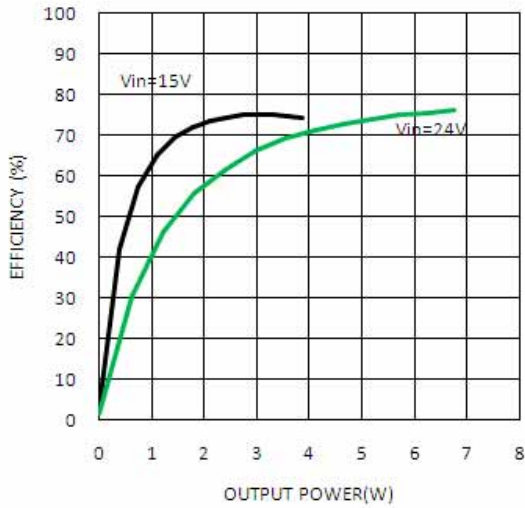


OUTPUT VOLTAGE - OUTPUT CURRENT

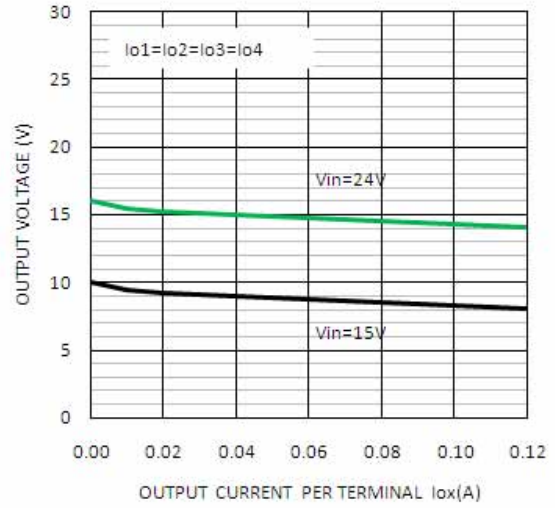


OUTPUT VOLTAGE - INPUT VOLTAGE

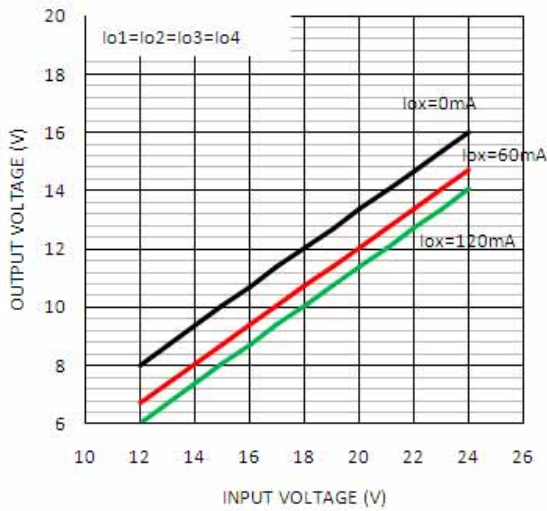


OUTPUT VOLTAGE - INPUT VOLTAGE

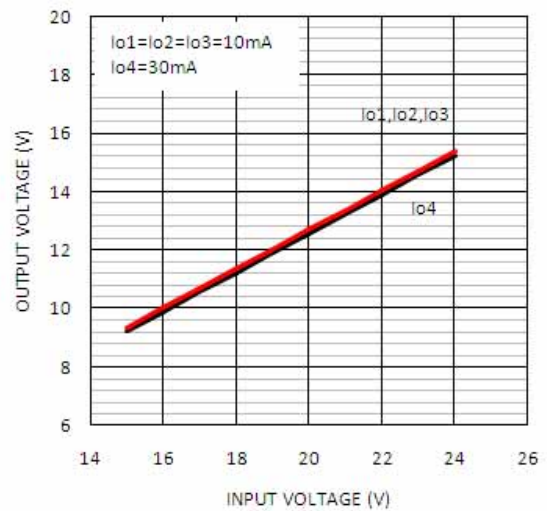

OUTPUT VOLTAGE - INPUT VOLTAGE

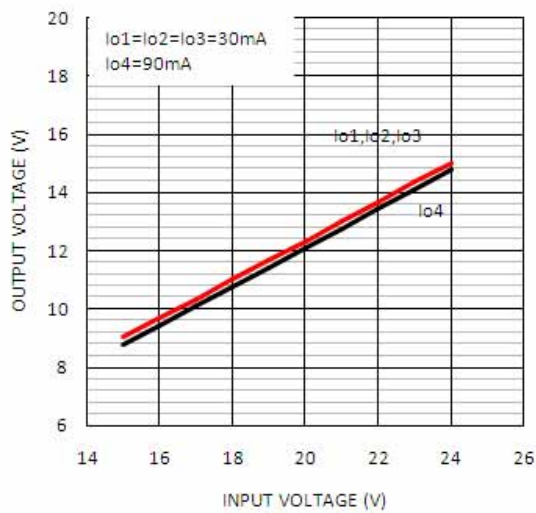

OUTPUT VOLTAGE - AMBIENT TEMPERATURE

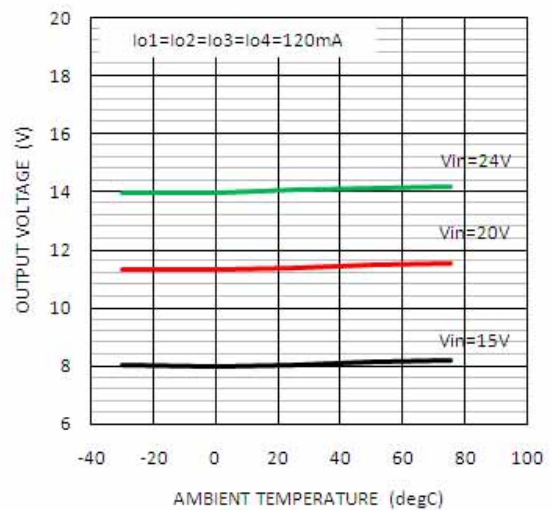


<<VLA107-655R>>

MAXIMUM RATINGS (unless otherwise noted, $V_{IN}=24V, T_a=25^{\circ}C$)

Symbol	Parameter	Conditions	Ratings	Unit
V_{IN}	Input voltage	Between pins 1,2,3 and 6,7,8	25	V
I_o	Output current	Between pins 21-22,24-25,27-28,30-31	120	mA
T_{opr}	Operating temperature	No condensation	-30 ~ +75(*1)	$^{\circ}C$
T_{stg}	Storage temperature	No condensation	-40 ~ +85	$^{\circ}C$
V_{iso1}	Isolation voltage between input and output	Sine wave voltage, 60Hz, 1min	2500	Vrms
V_{iso2}	Isolation voltage between each output	Sine wave voltage, 60Hz, 1min	2500	Vrms


(*1) Please refer to de-rating characteristics.

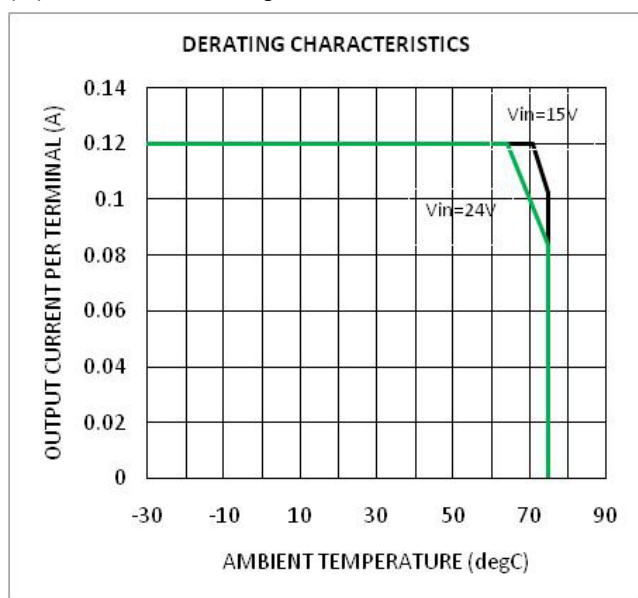**ELECTRICAL CHARACTERISTICS** (unless otherwise noted, $T_a=25^{\circ}C$)


Symbol	Parameter	Test conditions	Limits			Unit
			MIN.	TYP.	MAX.	
V_{IN}	Input voltage	Recommended range	12	-	24	V
V_{ox}	Output voltage	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0mA$	18.5	20	21.5	V
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	16	17.5	19	
Reg_L	Load regulation	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0 \sim 120mA$	-	15	-	%
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=0mA, I_{o4}=0 \sim 120mA$	-	7	-	
V_{p-p}	Output ripple	$V_{IN}=24V, I_{ox}=120mA$	-	40	-	mVp-p
η	Efficiency	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	-	75	-	%

<<VLA107-655R>> TYPICAL CHARACTERISTIC CURVES


EFFICIENCY - OUTPUT POWER

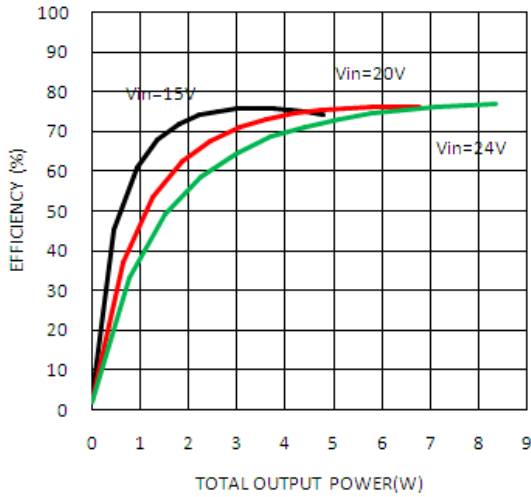


OUTPUT VOLTAGE - OUTPUT CURRENT

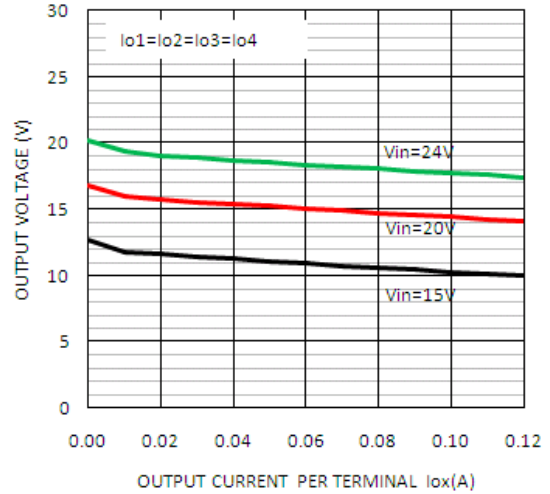


OUTPUT VOLTAGE - INPUT VOLTAGE

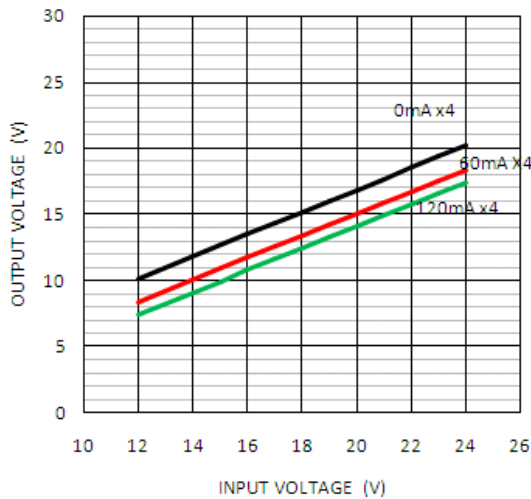


OUTPUT VOLTAGE - INPUT VOLTAGE

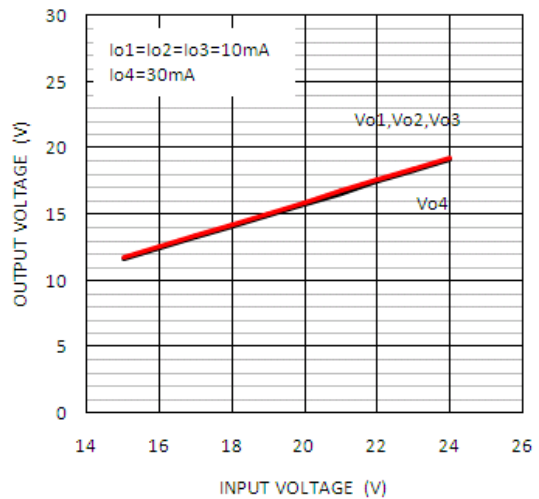

OUTPUT VOLTAGE - INPUT VOLTAGE

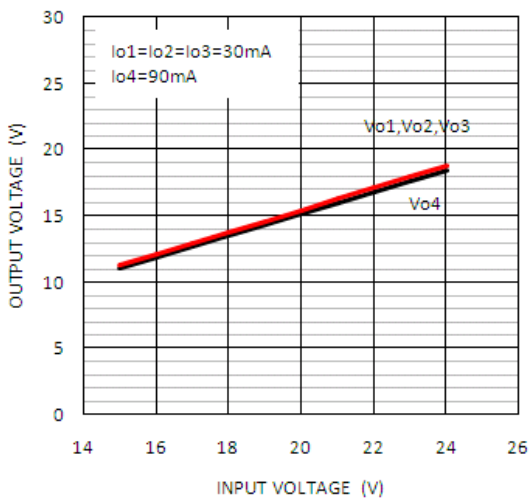

OUTPUT VOLTAGE - AMBIENT TEMPERATURE

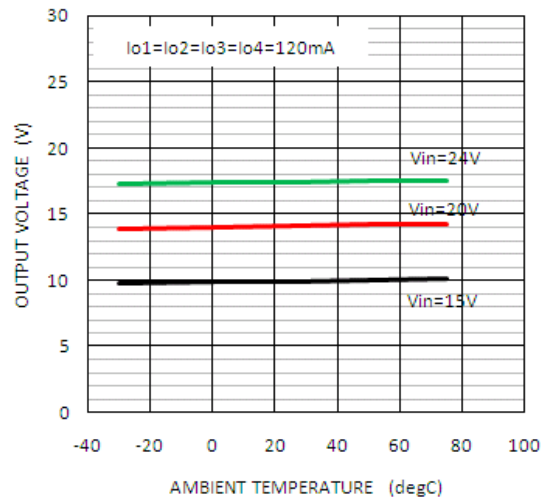


<<VLA107-666R>>

MAXIMUM RATINGS (unless otherwise noted, $V_{IN}=24V, T_a=25^{\circ}C$)

Symbol	Parameter	Conditions	Ratings	Unit
V_{IN}	Input voltage	Between pins 1,2,3 and 6,7,8	25	V
I_o	Output current	Between pins 21-22,24-25,27-28,30-31	120	mA
T_{opr}	Operating temperature	No condensation	-30 ~ +75(*1)	$^{\circ}C$
T_{stg}	Storage temperature	No condensation	-40 ~ +85	$^{\circ}C$
V_{iso1}	Isolation voltage between input and output	Sine wave voltage, 60Hz, 1min	2500	Vrms
V_{iso2}	Isolation voltage between each output	Sine wave voltage, 60Hz, 1min	2500	Vrms


(*1) Please refer to de-rating characteristics.

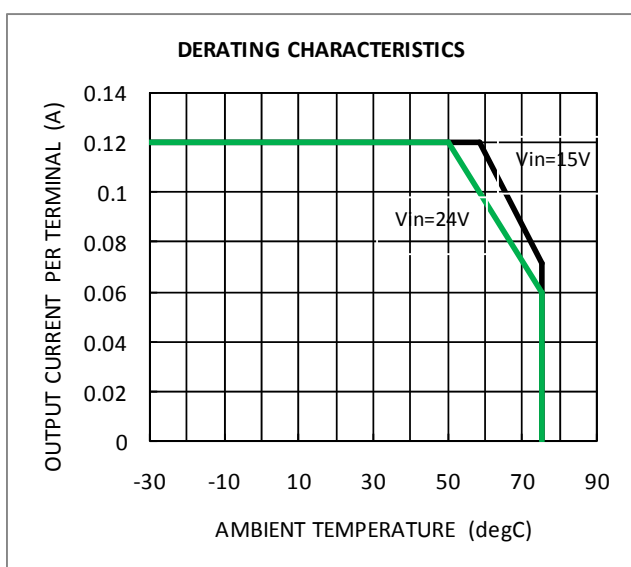**ELECTRICAL CHARACTERISTICS** (unless otherwise noted, $T_a=25^{\circ}C$)


Symbol	Parameter	Test conditions	Limits			Unit
			MIN.	TYP.	MAX.	
V_{IN}	Input voltage	Recommended range	12	-	24	V
V_{ox}	Output voltage	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0mA$	23	24.5	26	V
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	20	21.5	23	
Reg_{-L}	Load regulation	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0 \sim 120mA$	-	16	-	%
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=0mA, I_{o4}=0 \sim 120mA$	-	8	-	
V_{p-p}	Output ripple	$V_{IN}=24V, I_{ox}=120mA$	-	40	-	mVp-p
η	Efficiency	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	-	75	-	%

<<VLA107-666R>> TYPICAL CHARACTERISTIC CURVES


EFFICIENCY - OUTPUT POWER

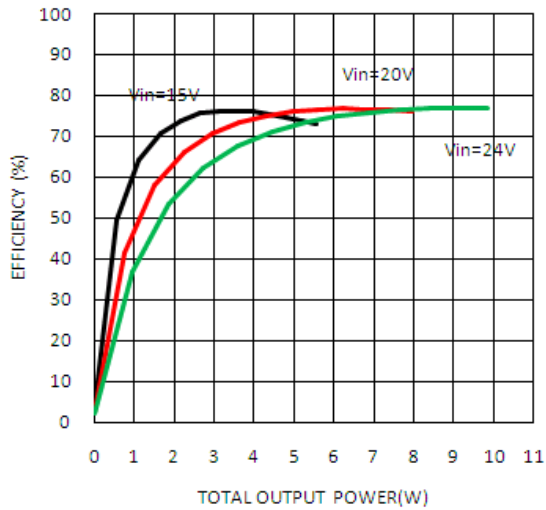


OUTPUT VOLTAGE - OUTPUT CURRENT

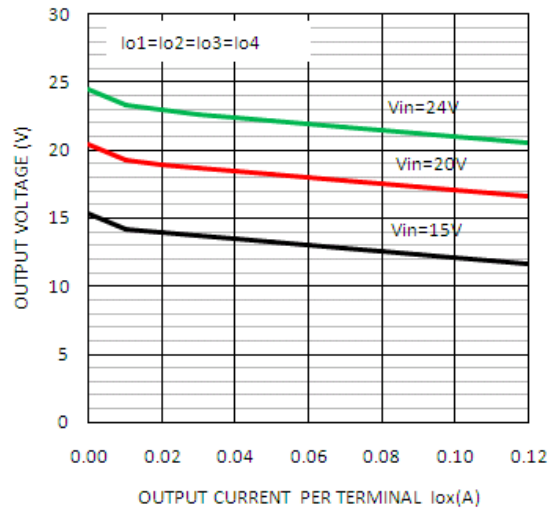


OUTPUT VOLTAGE - INPUT VOLTAGE

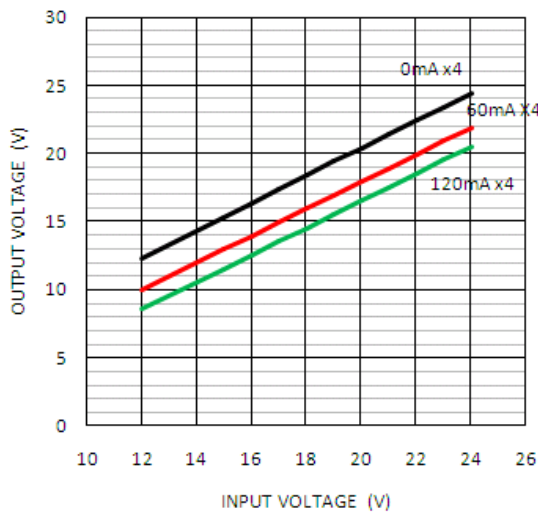


OUTPUT VOLTAGE - INPUT VOLTAGE

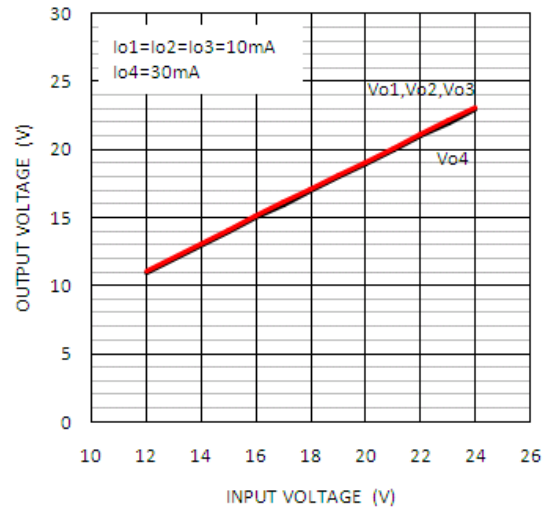

OUTPUT VOLTAGE - INPUT VOLTAGE

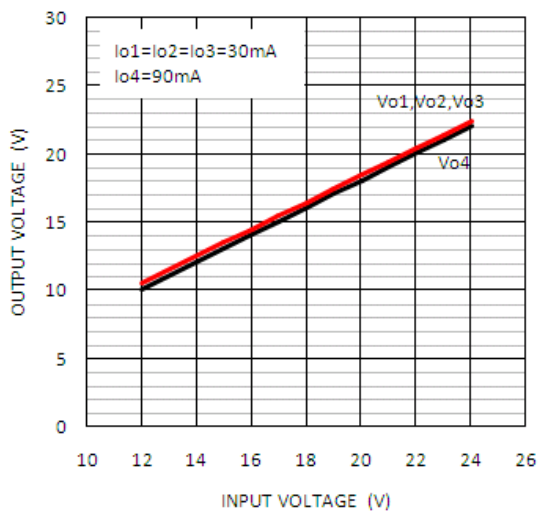

OUTPUT VOLTAGE - AMBIENT TEMPERATURE

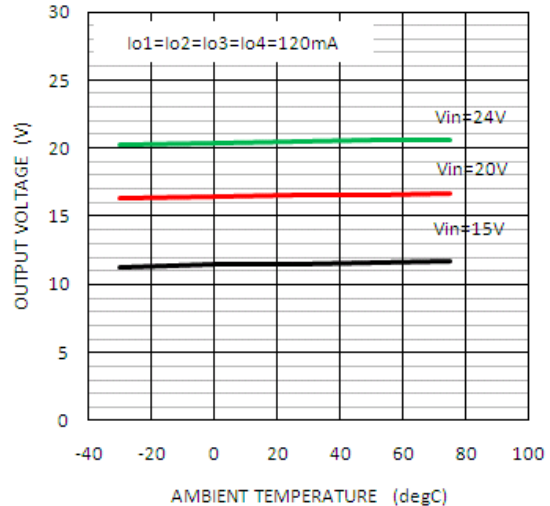


<<VLA107-677R>>

MAXIMUM RATINGS (unless otherwise noted, $V_{IN}=24V, T_a=25^{\circ}C$)

Symbol	Parameter	Conditions	Ratings	Unit
V_{IN}	Input voltage	Between pins 1,2,3 and 6,7,8	25	V
I_o	Output current	Between pins 21-22,24-25,27-28,30-31	120	mA
T_{opr}	Operating temperature	No condensation	-30 ~ +75(*1)	$^{\circ}C$
T_{stg}	Storage temperature	No condensation	-40 ~ +85	$^{\circ}C$
V_{iso1}	Isolation voltage between input and output	Sine wave voltage, 60Hz, 1min	2500	Vrms
V_{iso2}	Isolation voltage between each output	Sine wave voltage, 60Hz, 1min	2500	Vrms


(*1) Please refer to de-rating characteristics.

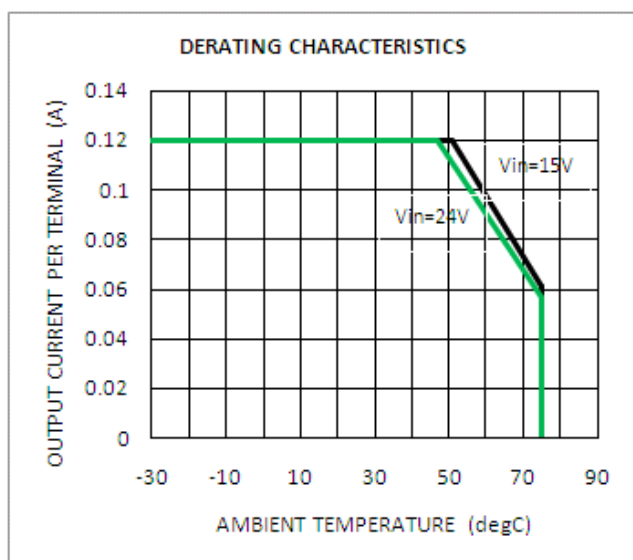**ELECTRICAL CHARACTERISTICS** (unless otherwise noted, $T_a=25^{\circ}C$)


Symbol	Parameter	Test conditions	Limits			Unit
			MIN.	TYP.	MAX.	
V_{IN}	Input voltage	Recommended range	12	-	24	V
V_{ox}	Output voltage	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0mA$	27	28.5	30	V
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	22	23.5	25	
		$V_{IN}=15V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0mA$	17	18	19	
		$V_{IN}=15V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	12	13	14	
		$V_{IN}=15V, I_{o1}=I_{o2}=I_{o3}=10mA, I_{o4}=30mA$	15.5	16.5	17.5	
		$V_{IN}=15V, I_{o1}=I_{o2}=I_{o3}=30mA, I_{o4}=90mA$	14.5	15.5	16.5	
$Reg-L$	Load regulation	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=0 \sim 120mA$	-	16	-	%
		$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=0mA, I_{o4}=0 \sim 120mA$	-	8	-	
V_{p-p}	Output ripple	$V_{IN}=24V, I_{ox}=120mA$	-	40	-	mVp-p
η	Efficiency	$V_{IN}=24V, I_{o1}=I_{o2}=I_{o3}=I_{o4}=120mA$	-	75	-	%

<<VLA107-677R>> TYPICAL CHARACTERISTIC CURVES


EFFICIENCY - OUTPUT POWER

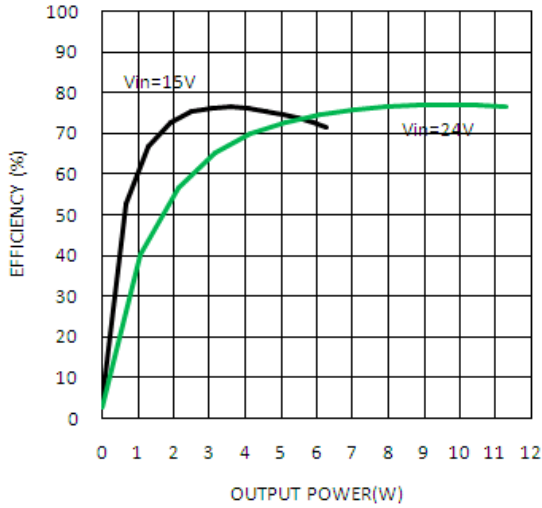


OUTPUT VOLTAGE - OUTPUT CURRENT

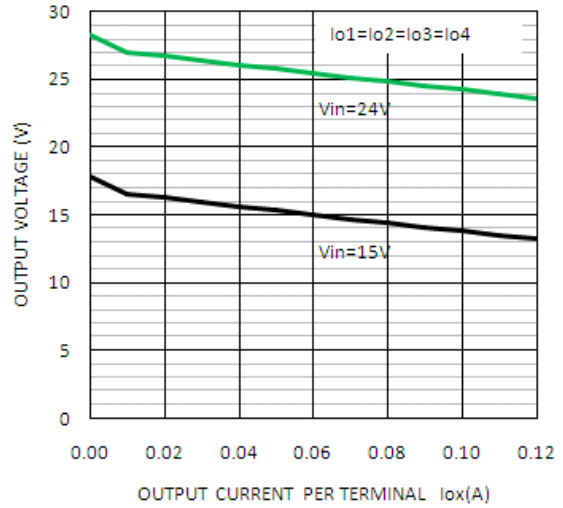


OUTPUT VOLTAGE - INPUT VOLTAGE

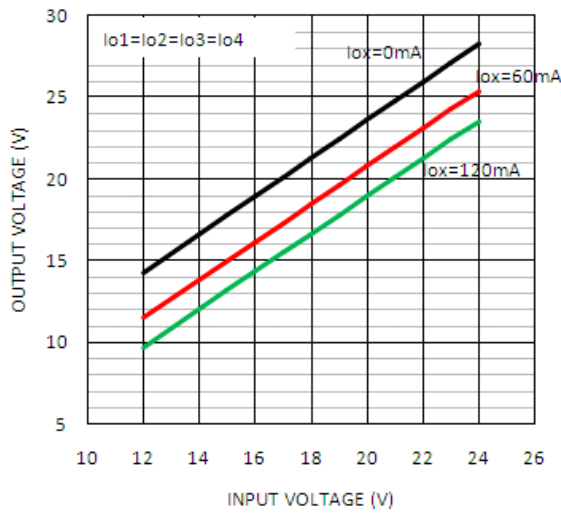


OUTPUT VOLTAGE - INPUT VOLTAGE

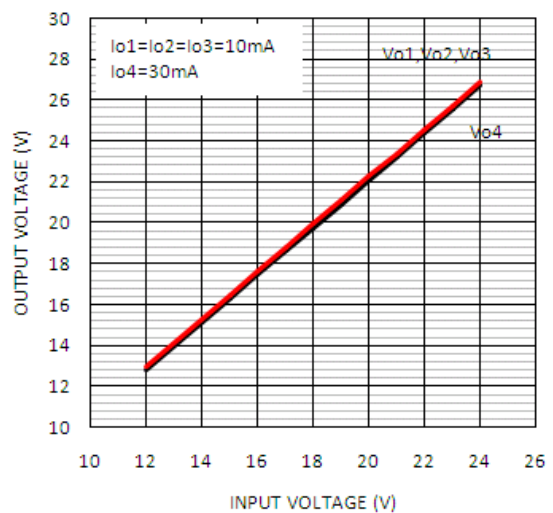


OUTPUT VOLTAGE - INPUT VOLTAGE

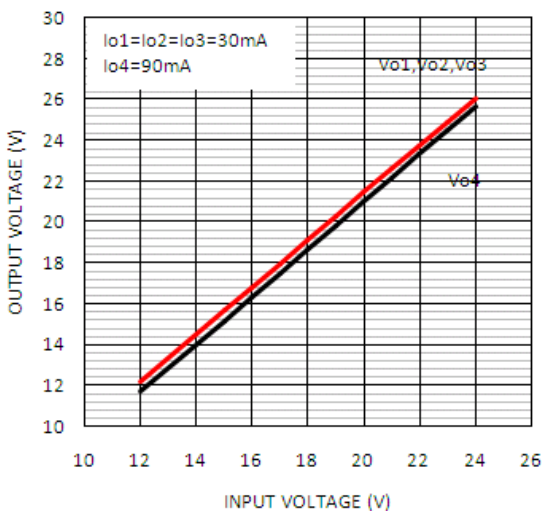

OUTPUT VOLTAGE - AMBIENT TEMPERATURE

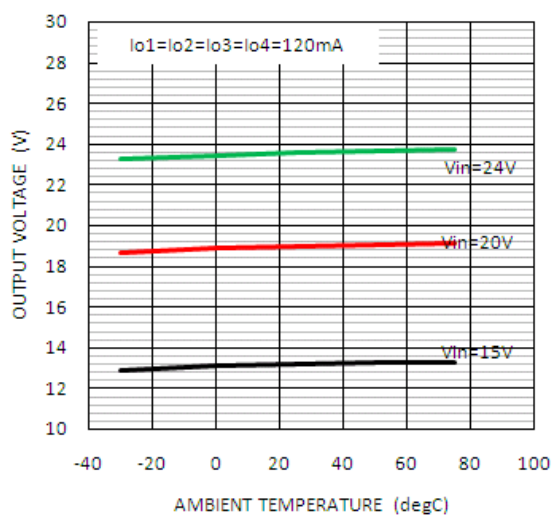

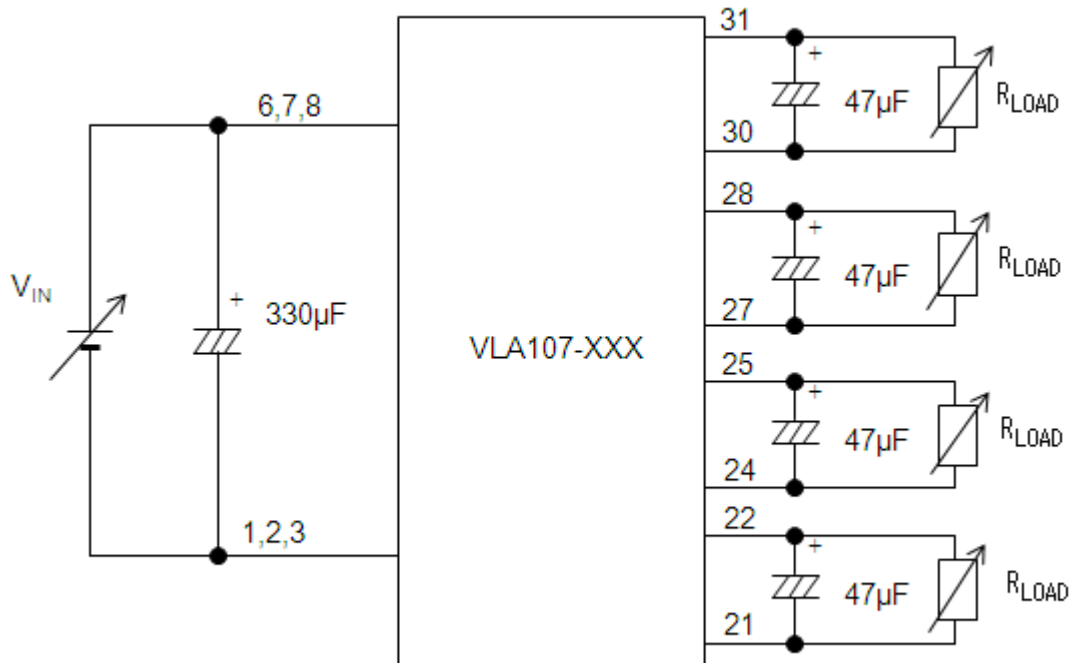TEST CIRCUIT**HANDLING PRECAUTIONS**

- When the VLA107 is used under excessive load condition, output side rectifying diodes will be destroyed. Care should be exercised so as not to operate the device above the rated maximum load current

FOR SAFETY USING

Great detail and careful attention are given to the production activity of Hics, such as the development, the quality of production, and in its reliability. However the reliability of Hics depends not only on their own factors but also in their condition of usage. When handling Hics, please note the following cautions.

CAUTIONS	
Packing	The materials used in packing Hics can only withstand normal external conditions. When exposed to outside shocks, rain and certain environmental contaminators, the packing materials will deteriorates. Please take care in handling.
Carrying	<ol style="list-style-type: none"> 1) Don't stack boxes too high. Avoid placing heavy materials on boxes. 2) Boxes must be positioned correctly during transportation to avoid breakage. 3) Don't throw or drop boxes. 4) Keep boxes dry. Avoid rain or snow. 5) Minimal vibration and shock during transportation is desirable.
Storage	<p>When storing Hics, please observe the following notices or possible deterioration of their electrical characteristics, risk of solderability, and external damage may occur.</p> <ol style="list-style-type: none"> 1) Devices must be stored where fluctuation of temperature and humidity is minimal, and must not be exposed to direct sunlight. Store at the normal temperature of 5 to 30 degrees Celsius with humidity at 40 to 60%. 2) Avoid locations where corrosive gasses are generated or where much dust accumulates. 3) Storage cases must be static proof. 4) Avoid putting weight on boxes.
Extended storage	When extended storage is necessary, Hics must be kept non-processed. When using Hics which have been stored for more than one year or under severe conditions, be sure to check that the exterior is free from flaw and other damages.
Maximum ratings	To prevent any electrical damages, use Hics within the maximum ratings. The temperature, current, voltage, etc. must not exceed these conditions.
Polarity	To protect Hics from destruction and deterioration due to wrong insertion, make sure of polarity in inserting leads into the board holes, conforming to the external view for the terminal arrangement.

Keep safety first in your circuit designs!

- ISAHAYA Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1)placement of substitutive, auxiliary circuits, (2)use of non-flammable material or (3)prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to our customers in the selection of the ISAHAYA products best suited to the customer's application; they don't convey any license under any intellectual property rights, or any other rights, belonging to ISAHAYA Electronics Corporation or a third party.
- ISAHAYA Electronics Corporation assumes no responsibility for any damage, or infringement of any third party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by ISAHAYA Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for the latest product information before purchasing a product listed herein.
- ISAHAYA Electronics Corporation products are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of ISAHAYA Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for further details on these materials or the products contained therein.