
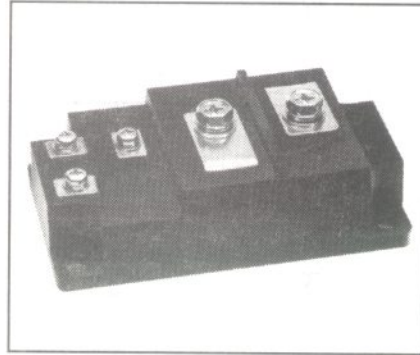


Single Darlington Transistor Module 500 Amperes/600 Volts

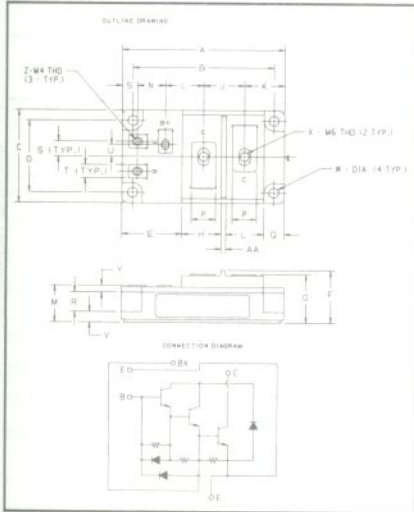

KS624550
Single Darlington
Transistor Module
500 Amperes/600 Volts

600 Volt KS624550 Outline Drawing

Dimension	Inches	Millimeters
A	4.212	107
B	3.661	93
C	2.441	62
D	1.890 ± .010	48 ± 0.25
E	1.476	37.5
F	1.378 Max.	35 Max.
G	1.268	32.2
H	1.102	28
J	1.063	27
K	1.043	26.5
L	.984	25
M	.964	24.5
N	.728	18.5
P	.630	16
Q	.531	13.5
R	.512	13
S	.394	10
T	.354	9
U	.315	8
V	.276	7
W	.256 Dia.	6.5 Dia.
X	M6 Metric	M6
Y	.177	4.5
Z	M4 Metric	M4
AA	.118	3

Description

Powerex Single Darlington Transistor Modules are designed for use in switching applications. The modules are isolated, consisting of one Darlington Transistor with a reverse parallel connected high-speed diode and base emitter speed up diodes.

Features:

- Isolated Mounting
- Planar Chips
- Discrete Fast Recovery Feed-Back Diode
- High Gain (h_{FE})
- Base-Emitter Speed Up Diodes

Applications:

- Inverters
- DC Motor Control
- Switching Power Supplies
- AC Motor Control

Ordering Information

Example: Select the complete eight digit module part number you desire from the table - i.e. KS624550 is a 450 $V_{CEQ(SUS)}$ (600 V_{CEV}), 500 Ampere Single Darlington Module.

Type	$V_{CEQ(SUS)}$ Volts (x10)	Current Rating Amperes (x10)
KS62	45	50



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

KS624550
Single Darlington Transistor Module
500 Amperes/600 Volts

datasheet provided by datasheetbook.com

Maximum Ratings $T_J = 25^\circ\text{C}$ unless otherwise specified


	Symbol	KS624550	Units
Junction Temperature	T_J	- 40 to + 150	$^\circ\text{C}$
Storage Temperature	T_{STG}	- 40 to + 125	$^\circ\text{C}$
Collector-Emitter Sustaining Voltage	$V_{CEQ(SUS)}$	450	Volts
Collector-Emitter Sustaining Voltage $V_{BE} = -2\text{V}$	$V_{CEV(SUS)}$	600	Volts
Collector-Base Voltage	V_{CBO}	600	Volts
Emitter-Base Voltage	V_{EBO}	7	Volts
Collector-Emitter Voltage	V_{CEV}	600	Volts
Continuous Collector Current	I_C	500	Amperes
Diode Forward Current	I_{FM}	500	Amperes
Continuous Base Current	I_B	10	Amperes
Diode Surge Current	I_{FSM}	5000	Amperes
Power Dissipation	P_T	1780	Watts
Max. Mounting Torque M6 Terminal Screws (E,C)	—	26	in.-lb.
Max. Mounting Torque M4 Terminal Screws (B,Bx,E)	—	12	in.-lb.
Max. Mounting Torque M6 Mounting Screws	—	26	in.-lb.
Module Weight	—	640	Grams
V isolation	V_{RMS}	2500	Volts

Electrical and Mechanical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified


Characteristics	Symbol	Test Conditions	Min.	KS624550 Typ.	Max.	Units
Collector Cutoff Current	I_{CEV}	$V_{CE} = 600\text{V}, V_{BE} = -2\text{V}$	—	—	5	mA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 7\text{V}$	—	—	500	mA
DC Current Gain	h_{FE}	$I_C = 500\text{A}, V_{CE} = 2.5\text{V}$	750	—	—	—
Diode Forward Voltage	V_{FM}	$I_{FM} = 500\text{A}$	—	—	1.8	V
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = 500\text{A}, I_B = 67\text{A}$	—	—	2.5	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C = 500\text{A}, I_B = 67\text{A}$	—	—	3.5	V
Resistive Turn On	t_{on}	$V_{CC} = 300\text{V}$	—	—	30	μs
Load Storage Time	t_s	$I_C = 500\text{A}$	—	—	15	μs
Switch Times Fall Time	t_f	$I_{B1} = 3\text{A}, I_{B2} = -5\text{A}$	—	—	30	μs
Thermal Resistance, Case to Sink Lubricated	$R_{\theta CS}$	—	—	—	.04	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	Transistor Part	—	—	.07	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	Diode Part	—	—	.25	$^\circ\text{C/W}$

KS624550
Single Darlington Transistor Module
500 Amperes/600 Volts


DC CURRENT GAIN (TYPICAL)

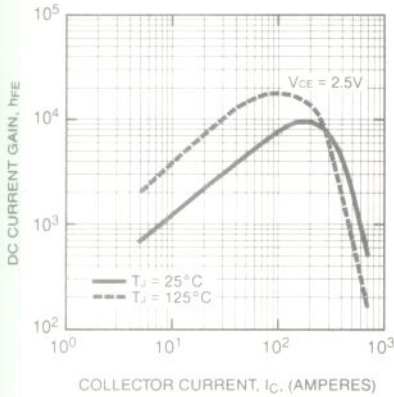


SATURATION VOLTAGE (TYPICAL)

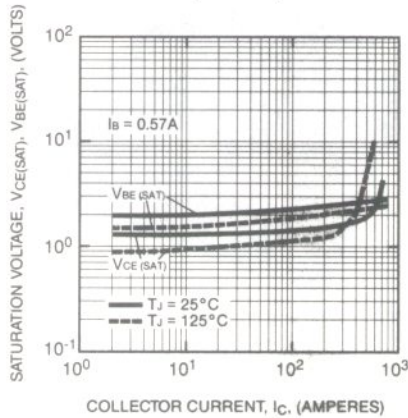


COMMON EMITTER OUTPUT CHARACTERISTICS (TYPICAL)

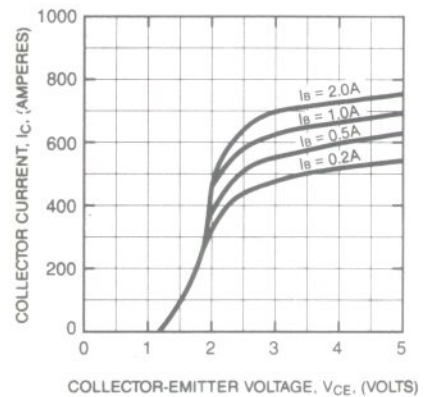


COMMON EMITTER INPUT CHARACTERISTICS (TYPICAL)

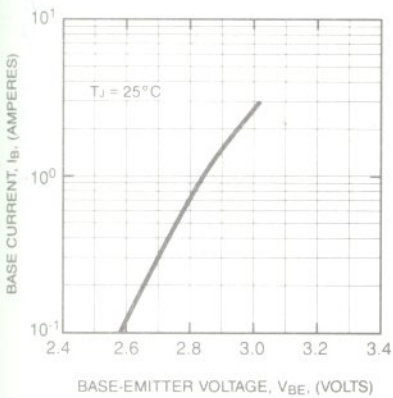


COLLECTOR-EMITTER SATURATION VOLTAGE (TYPICAL)

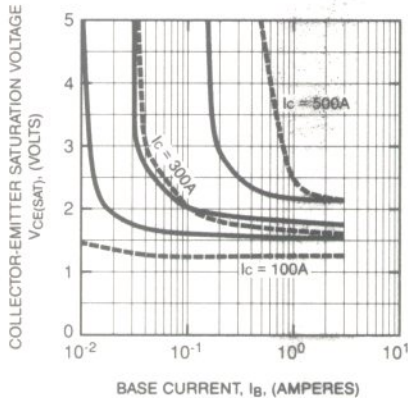


DIODE CHARACTERISTICS (TYPICAL)

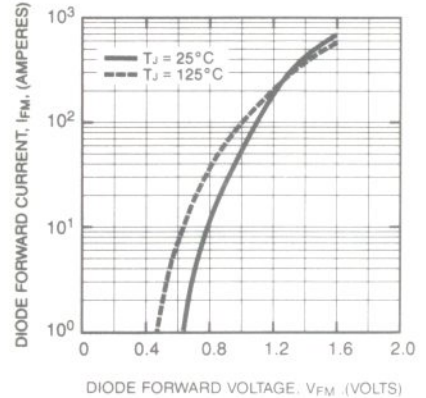


REVERSE BIAS SAFE OPERATING AREA (R.B.S.O.A.)

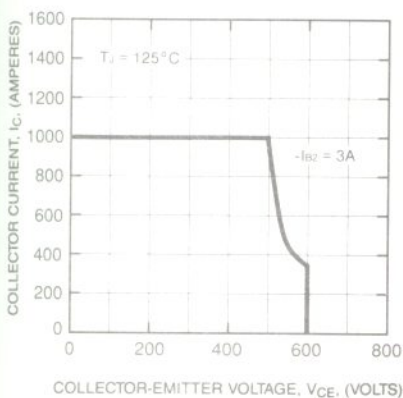

DIODE FORWARD SURGE CURRENT

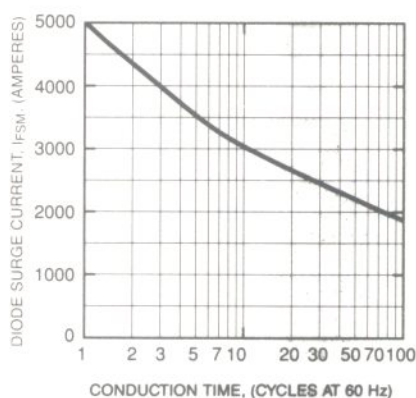

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (TRANSISTOR)

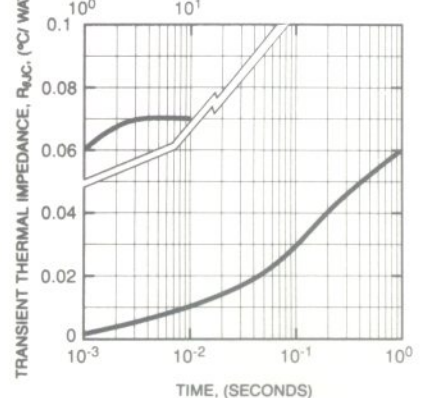

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

KS624550
Single Darlington Transistor Module
500 Amperes/600 Volts

