


Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272  
www.pwr.com

### POW-R-BLOK™ Single Diode Isolated Module 600 Amperes / Up to 2400 Volts

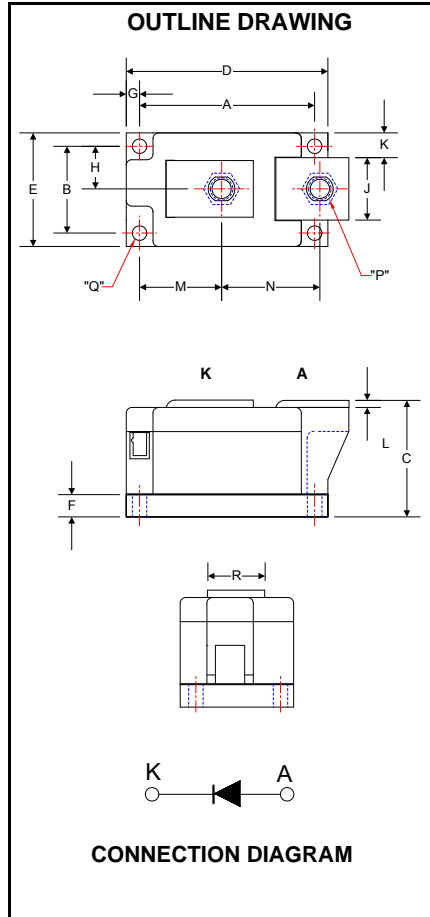

**LS41\_\_60**  
Single Diode  
POW-R-BLOK™ Module  
600 Amperes / 800-2400 Volts

#### LS41 Outline Dimensions

Dimension	Inches	Millimeters
A	3.15	80.0
B	1.50	38.0
C	2.05	52.1
D	3.62	92.0
E	1.97	50.0
F	0.39	9.9
G	0.24	6.1
H	0.75	19.0
J	0.99	25.1
K	0.48	12.2
L	0.12	3.1
M	1.45	36.8
N	1.76	44.7
P	M10 Metric	M10
Q	0.250 Dia.	6.35 Dia.
R	0.99	25.1

Note: Dimensions are for reference only.

#### Ordering Information:

Select the complete eight-digit module part number from the table below.

Example: LS412460 is a 2400V, 600 Ampere Single Diode Isolated POW-R-BLOK™ Module.

Type	Voltage Volts (x100)	Current Amperes (x10)
LS41	08	60
	10	
	12 Thru 24	

#### Description:

Powerex Single Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. POW-R-BLOK™ has been tested and recognized by the Underwriters Laboratories.

#### Features:

- Electrically Isolated Heatsinking
- Aluminum Nitride Isolator
- Compression Bonded Elements
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized

#### Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

#### Applications:

- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Power Supplies
- Large IGBT Circuit Front Ends

**Absolute Maximum Ratings**

Characteristics	Conditions	Symbol	Units	
Repetitive Peak Reverse Blocking Voltage		$V_{RRM}$	up to 2400	V
Non-Repetitive Peak Reverse Blocking Voltage ( $t < 5$ msec)		$V_{RSM}$	$V_{RRM} + 100$	V
RMS Forward Current		$I_{F(RMS)}$	950	A
Average Forward Current	180° Conduction, $T_c=106^{\circ}C$	$I_{F(AV)}$	600	A
Peak One Cycle Surge Current, Non-Repetitive	60 Hz, 100% $V_{RRM}$ reapplied	$I_{FSM}$	21000	A
	50 Hz, 100% $V_{RRM}$ reapplied	$I_{FSM}$	19000	A
Peak Three Cycle Surge Current, Non-Repetitive	60 Hz, 100% $V_{RRM}$ reapplied	$I_{FSM}$	15,500	A
Peak Ten Cycle Surge Current, Non-Repetitive	60 Hz, 100% $V_{RRM}$ reapplied	$I_{FSM}$	13,000	A
$I^2t$ for Fusing for One Cycle	8.3 milliseconds	$I^2t$	1,840,000	$A^2 \text{ sec}$
	10 milliseconds	$I^2t$	1,810,000	$A^2 \text{ sec}$
Operating Temperature		$T_J$	-40 to +150	$^{\circ}C$
Storage Temperature		$T_{stg}$	-40 to +150	$^{\circ}C$
Max. Mounting Torque, M6 Mounting Screw			55	in. – Lb.
			6	Nm
Max. Mounting Torque, M10 Terminal Screw			110	in. – Lb.
			12	Nm
Module Weight, Typical			816	g
			1.80	lb
V Isolation @ 25C		$V_{rms}$	3000	V


**Electrical Characteristics,  $T_J=25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Max.	Units
Repetitive Peak Reverse Leakage Current	$I_{RRM}$	Up to 2400V, $T_J=150^\circ\text{C}$		40	mA
Peak On-State Voltage	$V_{FM}$	$T_J=150^\circ\text{C}$ , $I_{FM}=1800\text{A}$		1.19	V
Threshold Voltage, Low-level	$V_{(TO)1}$	$T_J = 150^\circ\text{C}$ , $I = 15\%I_{F(AV)}$ to $\pi I_{F(AV)}$		0.747	V
Slope Resistance, Low-level	$r_{T1}$			0.243	$\text{m}\Omega$
Threshold Voltage, High-level	$V_{(TO)2}$	$T_J = 150^\circ\text{C}$ , $I = \pi I_{F(AV)}$ to $I_{FSM}$		0.914	V
Slope Resistance, High-level	$r_{T2}$			0.145	$\text{m}\Omega$
$V_{TM}$ Coefficients, Full Range		$T_J = 150^\circ\text{C}$ , $I = 15\%I_{F(AV)}$ to $I_{FSM}$	A =	5.05E-01	
			B =	3.44E-02	
			C =	8.13E-05	
			D =	6.57E-03	
		$V_{TM} = A + B \ln I + C I + D \text{Sqrt } I$			


**Thermal Characteristics**

Characteristics	Symbol		Max.	Units
Thermal Resistance, Junction to Case	$R_{\theta J-C}$	Per Module / Junction	0.0650	$^\circ\text{C/W}$
Thermal Impedance Coefficients	$Z_{\theta J-C}$	$Z_{\theta J-C} = K_1 (1 - \exp(-t/\tau_1))$ $+ K_2 (1 - \exp(-t/\tau_2))$ $+ K_3 (1 - \exp(-t/\tau_3))$ $+ K_4 (1 - \exp(-t/\tau_4))$	$K_1 = 8.03\text{E-}04$	$\tau_1 = 3.39\text{E-}04$
			$K_2 = 1.03\text{E-}02$	$\tau_2 = 3.15\text{E-}03$
			$K_3 = 1.64\text{E-}02$	$\tau_3 = 1.06\text{E-}01$
			$K_4 = 3.75\text{E-}02$	$\tau_4 = 2.066$
Thermal Resistance, Case to Sink Lubricated	$R_{\theta C-S}$	Per Module	0.02	$^\circ\text{C/W}$


**Maximum On-State Forward Voltage Drop**  
( $T_j = 150^\circ\text{C}$ )

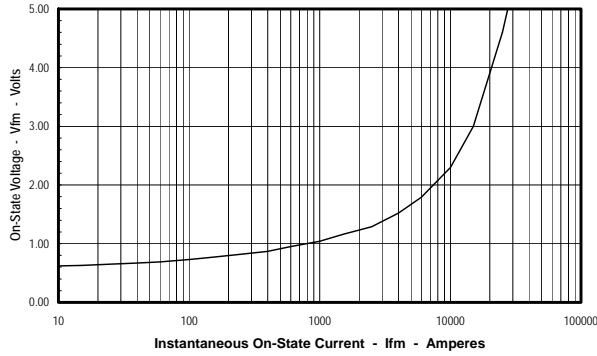


**Maximum Transient Thermal Impedance**  
(Junction to Case)

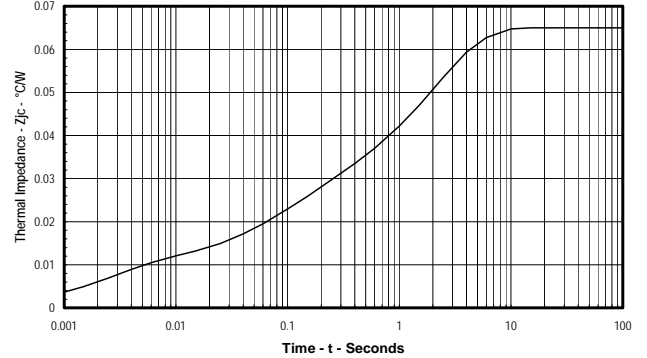


**Maximum On-State Power Dissipation**  
(Sinusoidal Waveform)

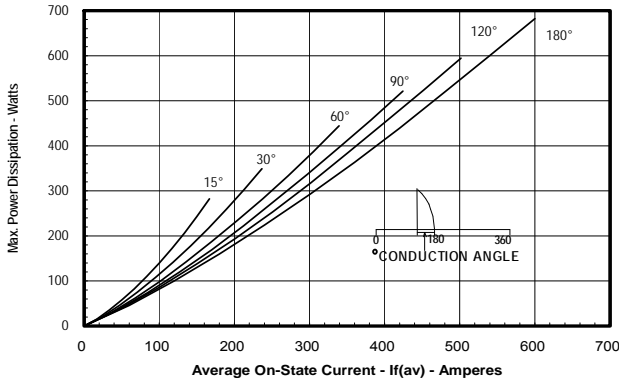

**Maximum Allowable Case Temperature**  
(Sinusoidal Waveform)

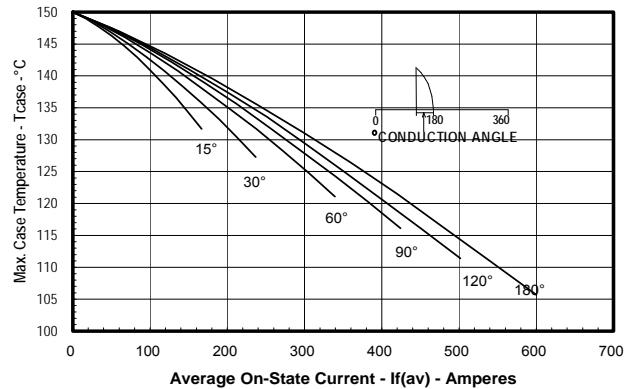

**Maximum On-State Power Dissipation**  
(Rectangular Waveform)

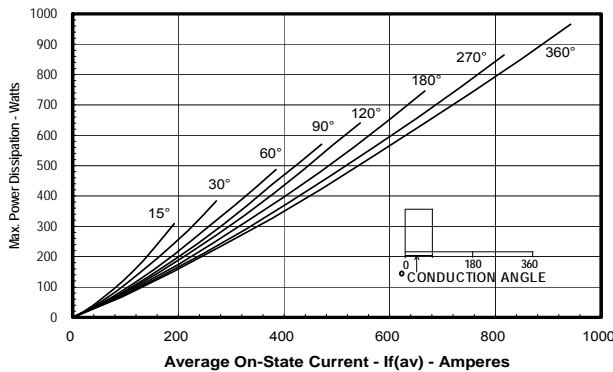

**Maximum Allowable Case Temperature**  
(Rectangular Waveform)

